



High-precision Fiber cleaver

New appearance design | patent protection



FC-30


Optical Fiber Cleaver

Double fixture standard

Equipped with two fiber holders, easy to carry



Novice use to improve cutting efficiency

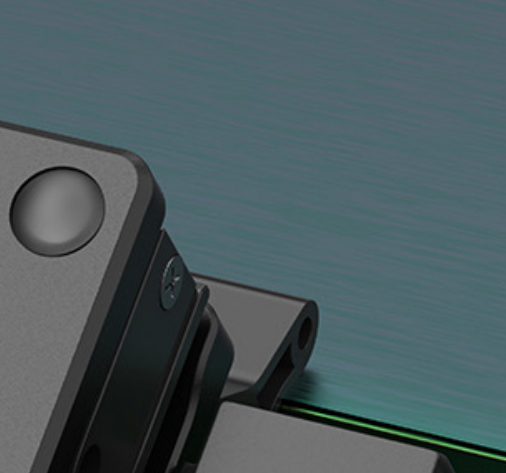

Experienced users, fast and convenient

Bottom tool storage slot


Newly added bottom hexagonal wrench storage slot for easy access and adjustable knife at any time



Strong magnetic attraction does not fall

Tungsten steel blade


Tungsten steel blade, wear resistance, high hardness, corrosion resistance.

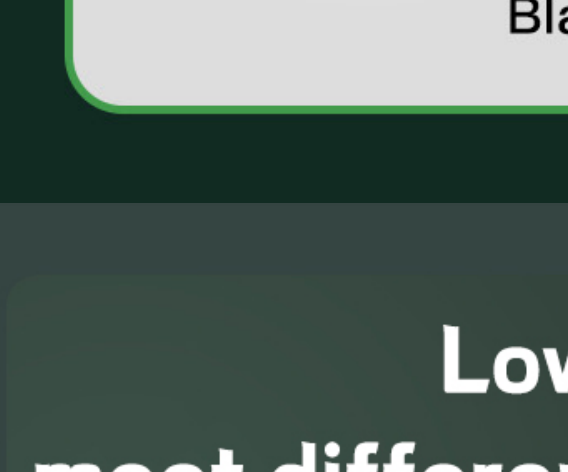

Cleaving angle $\leq 0.5^{\circ}$

Blade life 48000 times

Low loss meet different instructions of hot melt and cold welding

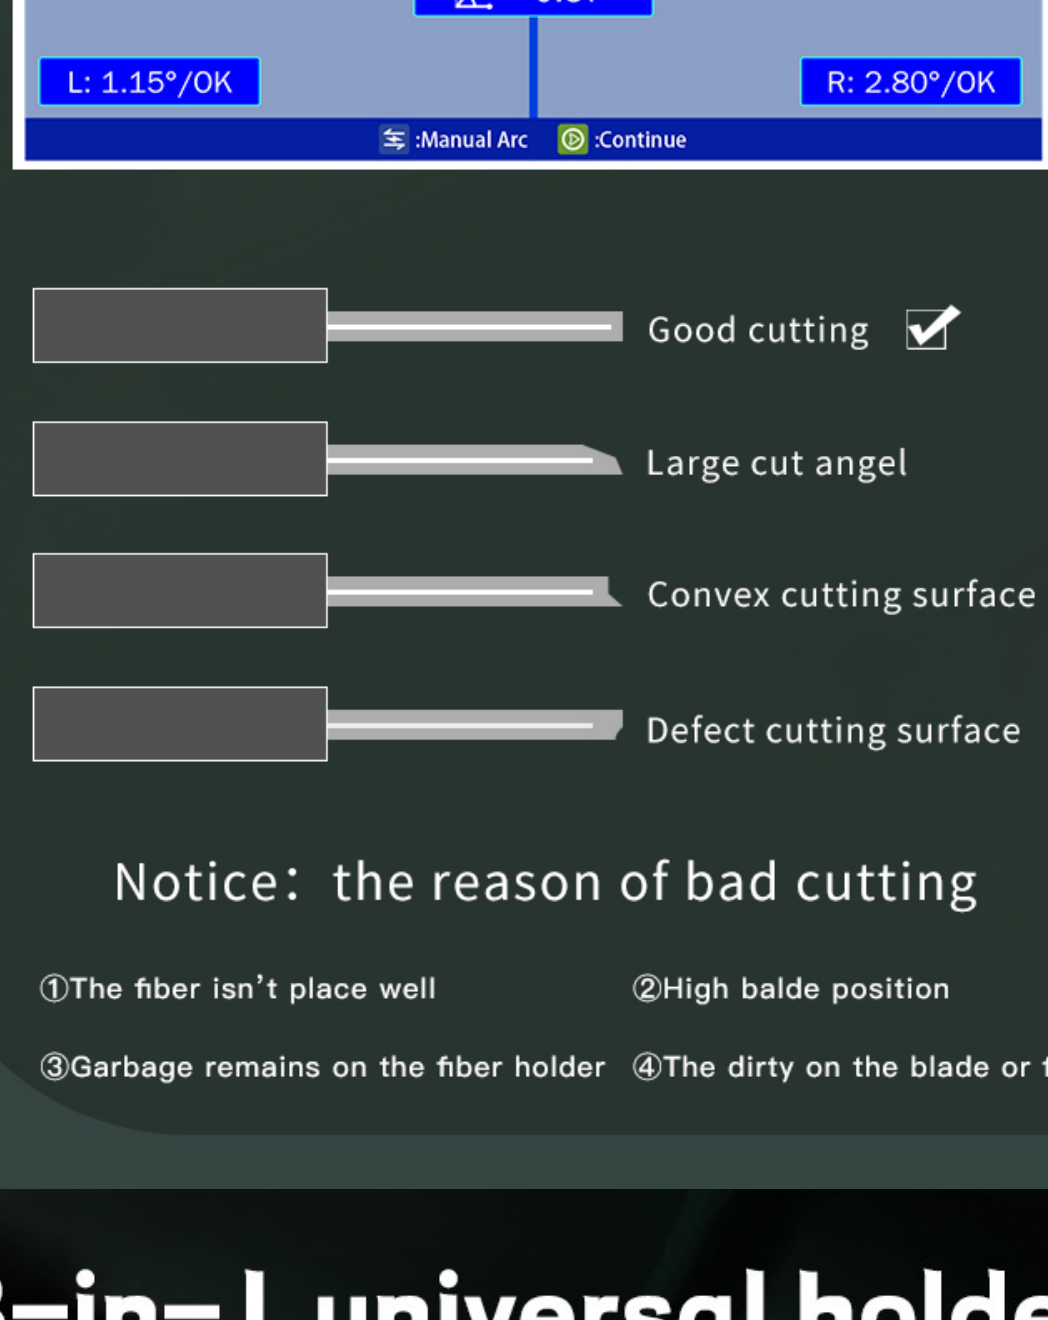


Notice: the reason of bad cutting

- ①The fiber isn't place well ②High blade position
③Garbage remains on the fiber holder ④The dirty on the blade or fiber

3-in-1 universal holder

Suitable for various optical fiber of 250~3.0mm

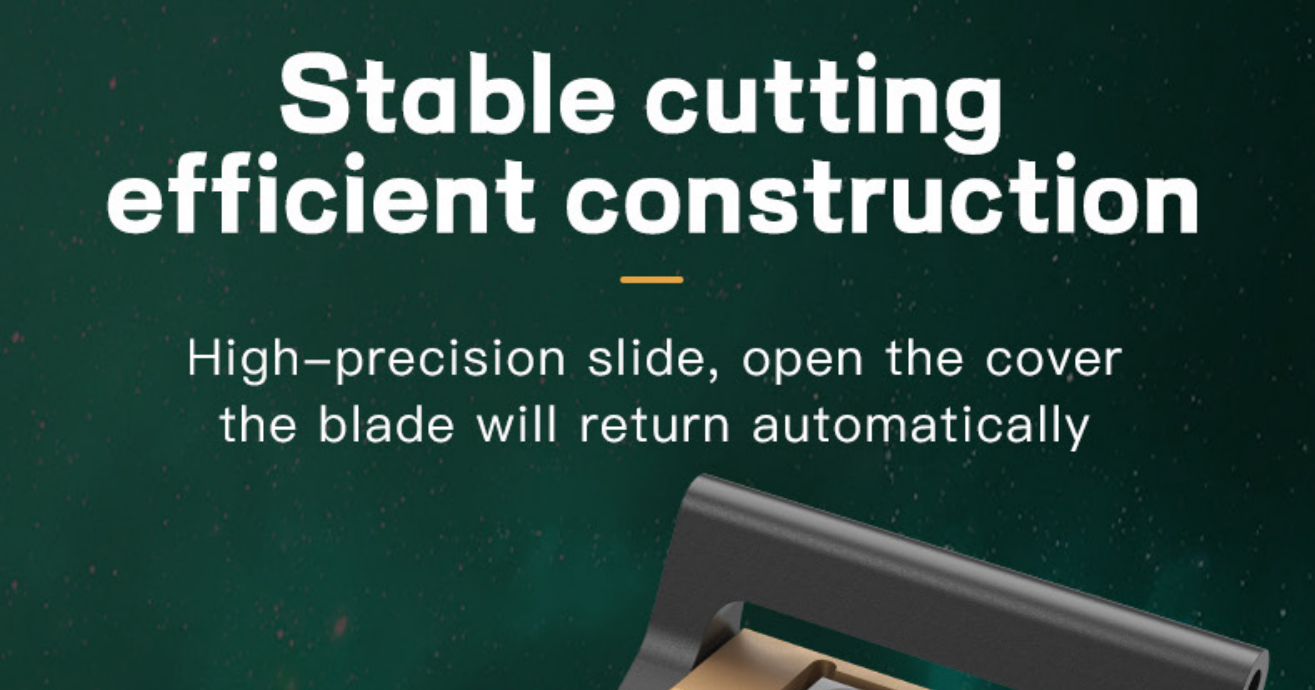

Jump fiber



Flat fiber




Pig tail fiber



Bare fiber

Stable cutting efficient construction

High-precision slide, open the cover the blade will return automatically

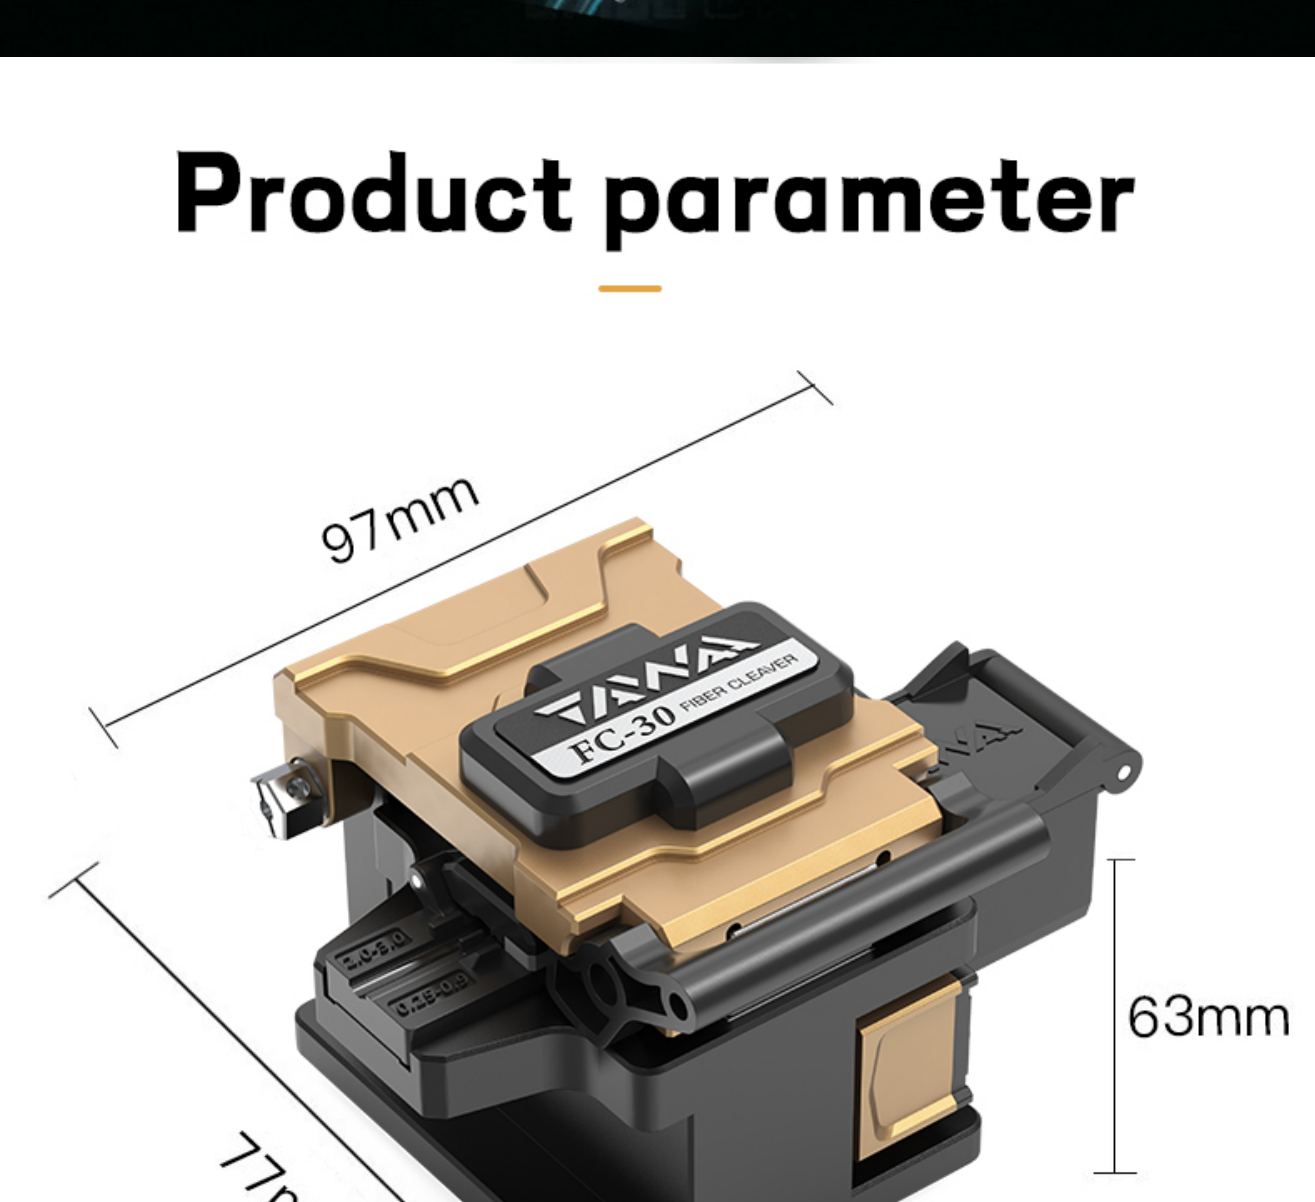

1. Open the upper cover

2. Slide rebound

Product parameter



97mm

77mm

63mm

FC-30

Fiber Material	Silica fiber
Cladding Diameter	125μm
Cleaved Length	Single: 8~20mm
Applicable Fiber Cable	Single core: 0.25~3.0mm
Typical Cleaved Angle	Typical 0.5° ★①
Typical Blade Life	48,000 (Replaceable) ★②
Waste Fiber Bin	Pre-fitted
Type Of Waste Fiber Bin	Manual
Automatically Return Of Blade	Pre-fitted
Dimension/Weight	77W * 97D * 63H (mm)/360g

★① The fiber cleave angle changes by operating environment

★② Blade life changes by operating environment